# LINDY PRODUCT SPECIFICATION (1 OF 1)

| Weight with | Weight without | Overall Length | LINDY Polybag | Product Number |
|---|---|---|---|---|
| 0.13kg | 0.12kg | 0.25m | P01 | **37370** |
| 0.18kg | 0.17kg | 0.5m | P02 | **37371** |
| 0.23kg | 0.22kg | 1m | P02 | **37372** |
| 0.31kg | 0.29kg | 2m | P02 | **37373** |
| 0.38kg | 0.36kg | 3m | P03 | **37374** |
| 0.57kg | 0.55kg | 5m | P03 | **37375** |
| 0.73kg | 0.71kg | 7.5m | P03 | **37376** |
| 0.92kg | 0.89kg | 10m | P03 | **37377** |
| 1.38kg | 1.35kg | 15m | P03 | **37378** |
| 1.63kg | 1.60kg | 20m | P03 | **37379** |

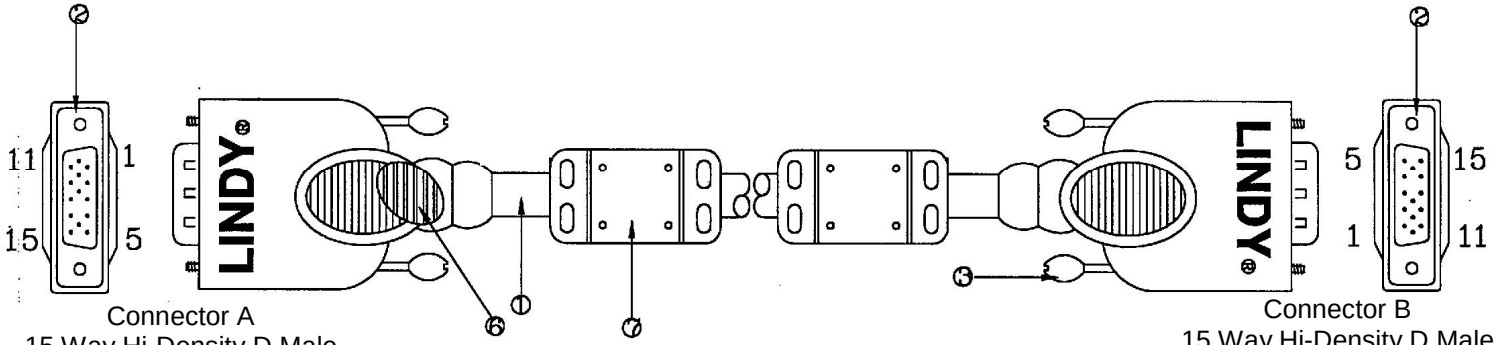


Connector A
15 Way Hi-Density D Male
Plug (Moulded)

Connector B
15 Way Hi-Density D Male
Plug (Moulded)

**Cable-Printing:**

**"LINDY High Quality SVGA Cable – www.lindy.com UL E119932 AWM 2919 80℃ 30V"**

A B

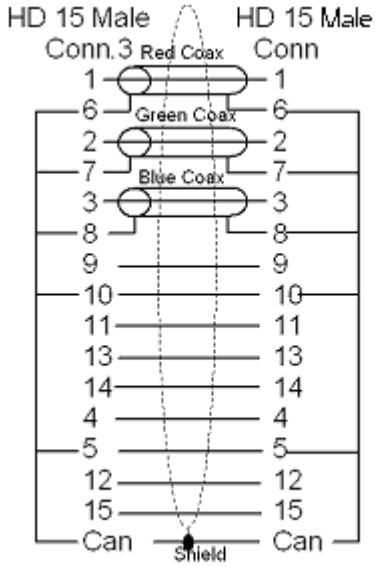


| no | Description |
|---|---|
| 7 | Ferrite core (RH17.5*9.5*28.5) |
| 6 | Copper foil 360° solder |
| 5 | Outside moulding PVC colour: Black |
| 4 | Inside moulding: PE |
| 3 | Screw #4-40 colour: LINDY-Red |
| 2 | HD15P Male solder type |
| 1 | Cable : UL2919 {28AWG x 3COAX+ 24AWG x 8C, Double Shield Jacket colour: Black **with LINDY-printing** |

Description: **LINDY SVGA Monitor Cable**

- Connector A: 15 Way Hi-Density D Plug
- Connector B: 15 Way Hi-Density D Plug
- Both ends of cable have a ferrite core (except 0.25m which has only one)
- Colour: Black

**Packaging:** LINDY Polybag as above with barcode label & minifolder

| Alterations | Issue | Date | BY | GB | DE |
|---|---|---|---|---|---|
| | 0 | 17.12.07 | AI | SF | |
| Weights updated | 1 | 29.05.08 | CS | oH | |
| UL number changed | 2 | 25.06.08 | ML | | ML |
| UL number changed | 3 | 12.12.11 | ML | | ML |
| Polybag size changed | 4 | 01.03.12 | BC | | ML |
| | | | | | |

Drawn By: BC, 01.03.2012

All connectors viewed from front

The following tolerances apply to overall dimensions -0% +10%